

FIG. 1




FIG. 2(a)

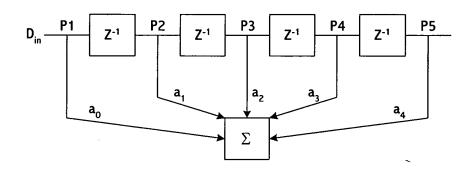


FIG. 2(b)




FIG. 3

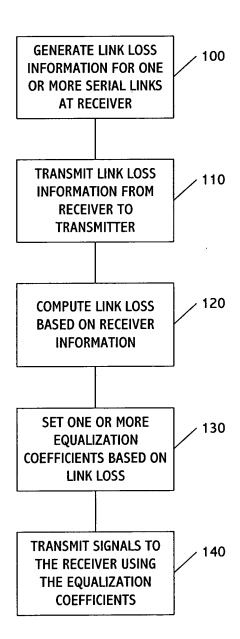


FIG. 4

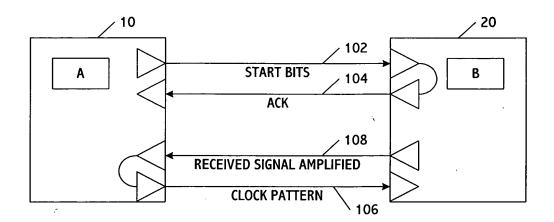


FIG. 5

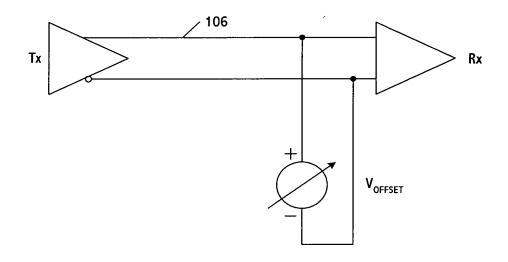


FIG. 6

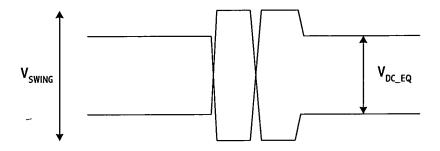


FIG. 7

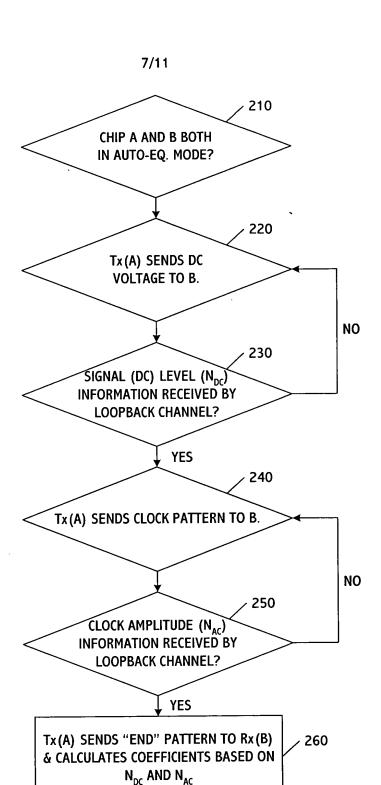


FIG. 8

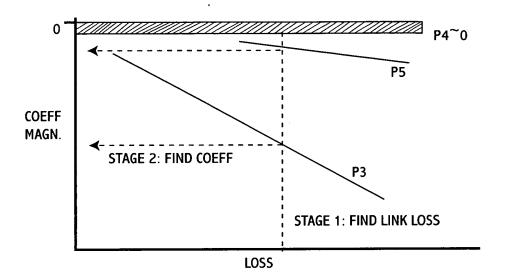


FIG. 9

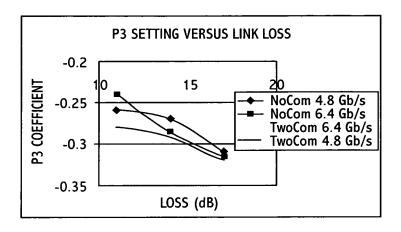


FIG. 10(a)

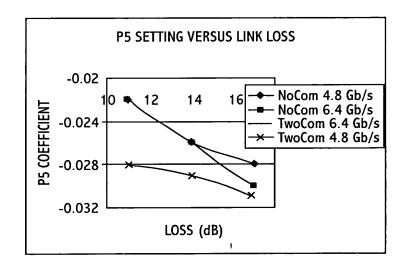


FIG. 10(b)

CASES	OPTIMUM TAP COEFF			
	Р3	P4	P5	Р6
3"_11.6Gts	-0.1876	-0.0375	-0.0084	-0.0018
4"_11.2Gts	-0.2033	-0.0375	-0.0083	-0.0046
5"_10.5Gts	-0.2163	-0.0375	-0.0078	-0.007
6"_9.8Gts	-0.2272	-0.0375	-0.0068	-0.0088
7"_9Gts	-0.245	-0.0131	-0.0092	-0.0107
8"_7.4Gts	-0.2311	-0.0081	-0.01	-0.0121

FIG. 11

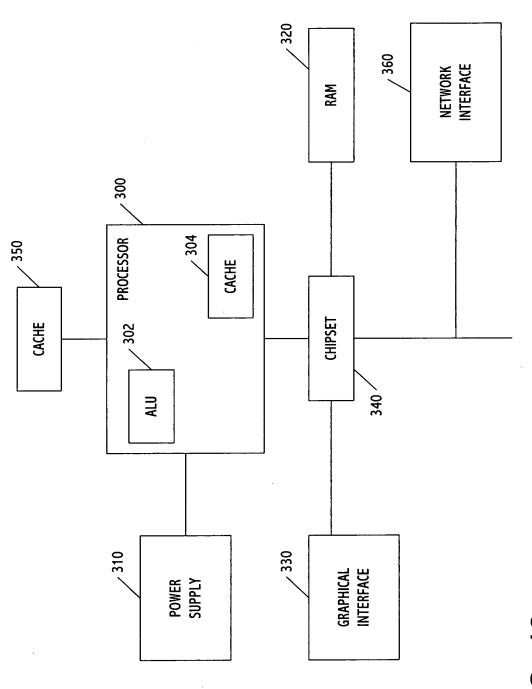


FIG. 12